

SWS1000L SPECIFICATIONS

PA578-01-01B

ITEMS	MODEL	SWS1000L	SWS1000L	SWS1000L	SWS1000L	SWS1000L	SWS1000L	SWS1000L	SWS1000L	
		-3	-5	-12	-15	-24	-36	-48	-60	
1 Nominal Output Voltage	V	3.3	5	12	15	24	36	48	60	
2 Maximum Output Current (Peak Output Current) (* 1)	A	200	200	88	70	44 (51)	29	22 (25)	17	
3 Maximum Output Power (Peak Output Power) (* 1)	W	660	1000	1056	1050	1056 (1224)	1044	1056 (1200)	1020	
4 Efficiency (Typ) (115/230VAC) (* 2)	%	75 / 77	79 / 81	82 / 84	82 / 84	84 / 86	84 / 86	84 / 86	84 / 86	
5 Input Voltage Range (* 3)	-				85 ~ 265VAC (47-63Hz) or 120 ~ 350VDC					
6 Input Current (Typ) (115/230VAC) (* 2)	A	8 / 4				12 / 6				
7 Inrush Current (Typ) (* 4)	-			20A/40A at 115VAC, 40A/40A at 230VAC, Ta=25°C (first inrush/second inrush)						
8 PFHC	-				Designed to meet IEC61000-3-2					
9 Power Factor (Typ) (115/230VAC) (* 2)	-				0.98 / 0.95					
10 Output Voltage Range	V	2.64~3.96	4.0~6.0	9.6~14.4	12.0~19.5	19.2~28.8	28.8~43.2	38.4~56.0	48.0~66.0	
11 Ripple and Noise (115/230VAC) (* 5)	0≤Ta≤74°C -20≤Ta<0°C	mV	120	120	150	150	200	200	200	
12 Line Regulation (* 6, 7)	mV	20	20	48	60	96	144	192	240	
13 Load Regulation (* 6, 8)	mV	30	30	72	90	144	216	288	360	
14 Temperature Coefficient	-				Less than 0.02%/°C					
15 Over Current Protection (* 9)	A	210~	210~	92.4~	73.5~	51.6~	30.5~	25.3~	17.9~	
16 Over Voltage Protection (* 10)	V	4.12~5.61	6.25~7.25	15.0~17.4	20.2~23.4	30.0~34.8	45.0~52.2	58.5~68.2	69.0~81.0	
17 Hold-Up Time (Typ) (115/230VAC) (* 2)	-				20ms					
18 Leakage current (Typ) (* 11)	-				0.1mA at 115VAC, 60Hz / 0.2mA at 230VAC, 60Hz					
19 Remote Sensing	-				Possible					
20 Remote ON/OFF control	-				Possible					
21 Monitoring Signal	-				ALM (Open Collector Output)					
22 Parallel Operation	-				Possible					
23 Series Operation	-				Possible					
24 Operating Temperature (* 12)	-				-20 ~ +74 °C (-20°C ~ +50°C: 100%, +74°C: 50%) 100% load start up at -40°C					
25 Operating Humidity	-				20 ~ 90 %RH (No dewdrop)					
26 Storage Temperature	-				-40 ~ +85°C					
27 Storage Humidity	-				10 ~ 95%RH (No dewdrop)					
28 Cooling	-				Forced air by build-in fan					
29 Withstand Voltage	-				Input - Output : 4.0kVAC (20mA), Input - FG : 2.0kVAC (20mA) Output - FG : 500VAC (100mA) (60V model: 651VAC(130mA)), Output - CNT/ALM/AUX : 100VAC (100mA) for 1min.					
30 Isolation Resistance	-				Input - FG, Input - Output and Output - FG: More than 50MΩ (500VDC) Output - CNT/ALM/AUX: More than 50MΩ (100VDC) at Ta=25°C and 70%RH					
31 Vibration (* 13)	-				Designed to meet MIL-STD-810F 514.5 Category 4, 10					
32 Shock (In package)	-				Designed to meet MIL-STD-810F 516.5 Procedure I, VI					
33 Safety (* 14)	-				Approved by UL60950-1, CSA60950-1, EN60950-1, EN50178, UL60601-1, EN60601-1, CSA-C22.2 No.601.1-M90 Designed to meet DENAN, EN61010-1.					
34 Line Dip	-				Designed to meet SEMI-F47 (200VAC line only)					
35 EMI	-				Designed to meet VCCI-B, FCC-B, EN55011/EN55022-B					
36 Immunity	-				Designed to meet EN61000-4-2 (Level 2,3), -3 (Level 3), -4 (Level 3), -5 (Level 3,4), -6 (Level 3), -8 (Level 4), -11					
37 Weight (Typ)	-				2.3kg					
38 Dimension (W x H x D)	mm				150 x 61 x 240 (Refer to Outline Drawing)					

* Read instruction manual carefully , before using the power supply unit.

= NOTES=

* 1: (): Peak Output Current is possible at 170~265VAC input range , operating period at Peak Output Current is less than 10sec, duty less than 35% .

Average output power and current is less than Maximum Output Power and Maximum Output Current.

* 2 : At Maximum Output Power, nominal input voltage, Ta = 25°C.

* 3 : For cases where conformance to various safety specs (UL, CSA, EN) are required, to be described as 100 - 240VAC, 50 / 60Hz on name plate.

* 4 : First/second inrush current, not applicable for the in-rush current to Noise Filter for less than 0.2ms.

* 5 : Please refer to Fig A for measurement point of ripple and noise.

Ripple & noise are measured at 20MHz by using a twisted pair of load wires terminated with a 0.1uF and 47uF capacitor.

* 6 : Measure line & load regulation at output terminal M4 tapped point.

* 7 : 85 ~ 265VAC, constant load.

* 8 : No load - Full load (Maximum power), constant input voltage.

* 9 : Constant current limit with automatic recovery.

Avoid to operate at overload or dead short for more than 30 seconds.

* 10: OVP circuit will shutdown output, manual reset (Remote ON/OFF control reset or Re-power on).

* 11: Measured by each measuring method of UL, CSA, EN and DENAN (at 60Hz), Ta=25°C.

Worst case: < 0.3mA at 264VAC, 63Hz (Normal Condition); < 0.5mA (Single Fault Condition)

* 12: Refer to Output Derating Curve (PA578-01-02_) for details of output derating versus ambient temperature.

- Load (%) is percent of Maximum Output Power and Maximum Output Current (Item 2 and 3).


Do not exceed derating of Maximum Output Power and Maximum Output Current.

- 100% load start up at -40°C is possible. However, it may not fulfil all the specifications.

* 13: Category 4 exposure levels: Trunk transportation over U.S. highways, Composite two-wheeled trailer.

* 14: As for DENAN, designed to meet at 100VAC.

Fig. A

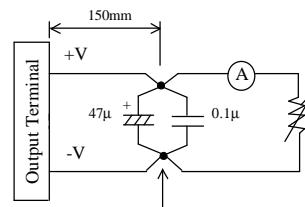


Measurement point for Ripple and Noise.

SWS1000L OUTPUT DERATING


PA578-01-02

Ta(°C)	LOAD(%)
	Mounting A,B,C
-20~50	100%
74	50%


OUTPUT DERATING CURVE

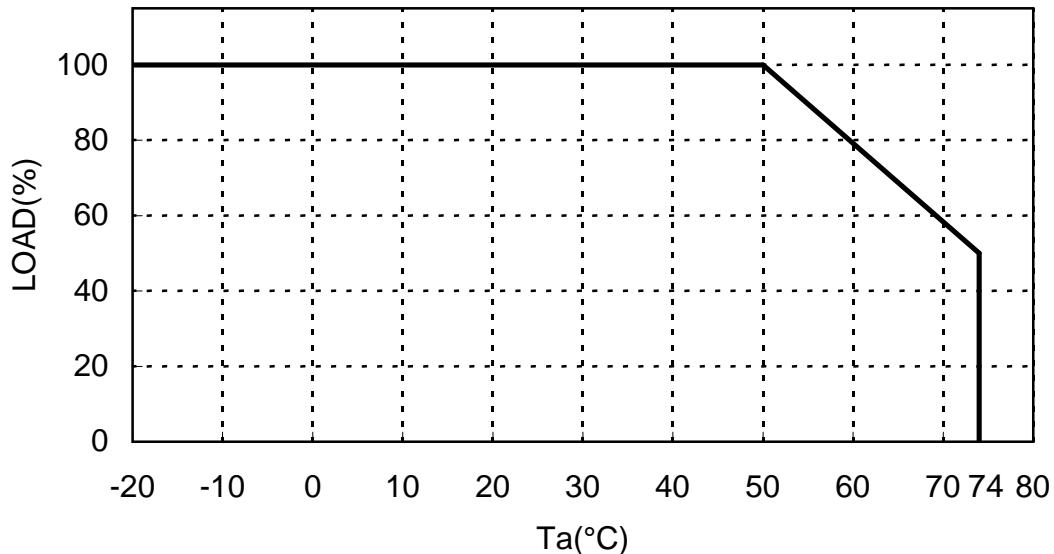


Mounting A

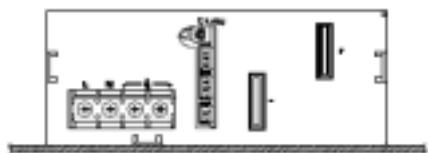

Mounting B

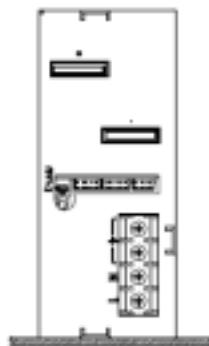

Mounting C

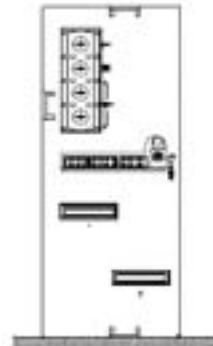

Don't Use

